


# ZT3000 Zero-Turn Mower

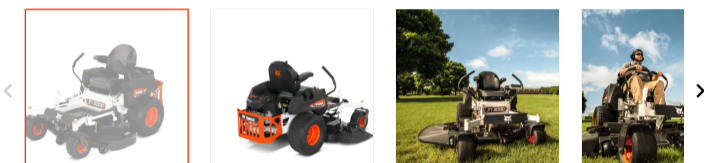

The ZT3000 is a zero-turn mower with several professional-grade features for a quality cut and smooth operation. The high-performance Kawasaki FT series engine, ergonomic controls, and large fuel tank ensure excellent results, while the tough, rigid steel-tube frame construction guarantees stability and dependability.

[Request a Quote](#)

[Schedule a Demo](#)

[Find a Dealer](#)

## ZT3000 Specifications

Key Specifications			
ZT3000 - 48"	ZT3000 - 61"	ZT3000 - 52"	
<b>Engine Power</b>			
14.9 kW	17.9 kW	17.9 kW	
<b>Cutting Deck Width</b>			
1219 mm	1549 mm	1320 mm	
<b>Ground Speed</b>			
12.8 km/h	12.8 km/h	12.8 km/h	
<b>Drive Wheel Size</b>			
22 x 11-10	22 x 11-10	22 x11-10	
Engine			
ZT3000 - 61"	ZT3000 - 48"	ZT3000 - 52"	
<b>Model</b>			
Kaw FT730V	Kaw FR651V	Kaw FT730V	
<b>Engine power</b>			
17.90 kW	14.90 kW	17.90 kW	
<b>Displacement</b>			
726.00 cm <sup>3</sup>	726.00 cm <sup>3</sup>	726.00 cm <sup>3</sup>	
<b>Fuel Capacity</b>			
14.30 L	14.30 L	14.30 L	
<b>Air Filter</b>			
Dual Element	Dual Element	Dual Element	
Electrical			
ZT3000 - 61"	ZT3000 - 48"	ZT3000 - 52"	
<b>Charging System</b>			
15.00 A	15.00 A	15.00 A	
<b>Clutch</b>			

169.00 N	169.00 N	169.00 N
----------	----------	----------

### Deck

ZT3000 - 61"	ZT3000 - 48"	ZT3000 - 52"
--------------	--------------	--------------

#### Mower Deck

TufDeck Pro Cutting System	TufDeck Pro Cutting System	TufDeck Pro Cutting System
----------------------------	----------------------------	----------------------------

#### Width

1549.00 mm	1219.00 mm	1320.00 mm
------------	------------	------------

#### Adjustable Anti-Scalp Rollers

7.0	3.0	3.0
-----	-----	-----

#### Cutting Height

38.0-124.0 mm	38.0-114.0 mm	38.0-114.0 mm
---------------	---------------	---------------

#### Blade Tip Speed

85.4 mps @ 3500 Engine rpm	73.6 @ 3500 Engine rpm	81.5 mps @ 3500 Engine rpm
----------------------------	------------------------	----------------------------

#### Discharge Chute

Flexible Molded Polymer	Flexible Molded Polymer	Flexible Molded Polymer
-------------------------	-------------------------	-------------------------

### Frame

ZT3000 - 61"	ZT3000 - 48"	ZT3000 - 52"
--------------	--------------	--------------

#### Front and Rear

1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame	1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame
---	---	---

#### Machine Length

2006.00 mm	1930.00 mm	1930.00 mm
------------	------------	------------

#### Machine Weight

361.00 kg	334.00 kg	342.00 kg
-----------	-----------	-----------

### Transmission

ZT3000 - 61"	ZT3000 - 48"	ZT3000 - 52"
--------------	--------------	--------------

#### Type

HG ZT-3100 Hydrostatic Transaxles	HG ZT-3100 Hydrostatic Transaxles	HG ZT-3100 Hydrostatic Transaxles
-----------------------------------	-----------------------------------	-----------------------------------

#### Pump Displacement

10.00 cm <sup>3</sup>	10.00 cm <sup>3</sup>	10.00 cm <sup>3</sup>
-----------------------	-----------------------	-----------------------

#### Oil Capacity

3.80 L	3.80 L	4.00 L
--------	--------	--------

#### Forward Speed

12.80 km/h	12.80 km/h	12.80 km/h
------------	------------	------------

#### Reverse Speed

5.60 km/h	5.60 km/h	5.60 km/h
-----------	-----------	-----------

### Wheels

ZT3000 - 61"	ZT3000 - 48"	ZT3000 - 52"
--------------	--------------	--------------

#### Drive Wheel Size

22 x 11-10	22 x 11-10	22 x 11-10
------------	------------	------------

#### Front Caster Wheel Size

13 x 6.5-6	13 x 6.5-6	13 x 6.5-6
------------	------------	------------

#### Caster Arm Attachment

Welded to Frame	Welded to Frame	Welded to Frame
-----------------	-----------------	-----------------

### Seat

ZT3000 - 61"	ZT3000 - 48"	ZT3000 - 52"
--------------	--------------	--------------

#### Description

High-Back, EVC and Spring Suspension Seat	High-Back, EVC and Spring Suspension Seat	High-Back, EVC and Spring Suspension Seat
---	---	---

#### Fore-Aft Adjustment

Seat Slide Lever	Seat Slide Lever	Seat Slide Lever
------------------	------------------	------------------

### Dimensions

ZT3000 - 61"	ZT3000 - 48"	ZT3000 - 52"
--------------	--------------	--------------

#### Overall Length

1930.00 mm	1930.00 mm	1930.00 mm
------------	------------	------------

#### Overall Width (Chute Up)

1600.00 mm	1241.00 mm	1241.00 mm
------------	------------	------------

Overall Width (Chute Down)		
1950.00 mm	1575.00 mm	1731.00 mm
Cutting Height		
38 - 114 mm	38 - 124 mm	38 - 124
Wheelbase		
1220.00 mm	1220.00 mm	1220.00 mm
Cutting Width		
1550.00 mm	1220.00 mm	1321.00 mm
Blade Length		
533.00 mm	413.00 mm	457.00 mm

## ZT3000 Features

[Expand all](#) ▾

▾ **Performance** <sup>4</sup>

▾ **Comfort** <sup>1</sup>

▾ **Built for your needs** <sup>1</sup>

▾ **Serviceability** <sup>1</sup>

▾ **Durability** <sup>1</sup>

## Similar Machines



### WB700 Zero-Turn Walk-Behind Mower

Walk-behind, mower with high stability in uneven terrain, powerful hydraulic drive, and a proven engine.

[Learn More](#) >

### ZT2000 Zero-Turn Mower

The Bobcat ZT2000 is an efficient zero-turn mower that offers unmatched durability and delivers a professional-quality cut.

[Learn More](#) >

### ZT3500 Zero-Turn Mower

Ride-on, zero-turn mower with a transmission and a high-perform

[Learn More](#) >

