


ZS4000 Zero-Turn Stand-On Mower

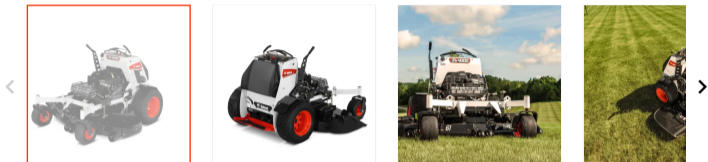

With its compact size, large drive tires, low center of gravity, and high ground clearance, the ZS4000 stand-on, zero-turn mower provides unbeatable agility and maneuverability to get around obstacles and navigate even more complex job sites with confidence. A powerful Kawasaki engine and a heavy-duty drive system ensure high travel speed and consistent results.

[Request a Quote](#)

[Schedule a Demo](#)

[Find a Dealer](#)

ZS4000 Specifications

| Key Specifications | | |
|---------------------------|------------------------|------------------------|
| ZS4000 - 52" | ZS4000 - 48" | ZS4000 - 61" |
| Engine Power | | |
| 17.9 kW | 14.9 kW | 17.9 kW |
| Cutting Deck Width | | |
| 1320 mm | 1219 mm | 1549 mm |
| Ground Speed | | |
| 16.8 km/h | 16.8 km/h | 16.8 km/h |
| Drive Wheel Size | | |
| 23 x 10.5-12 | 23 x 8.5-12 | 23 x 10.5-12 |
| Engine | | |
| ZS4000 - 61" | ZS4000 - 48" | ZS4000 - 52" |
| Model | | |
| Kaw FT730V | Kaw FT651V | Kaw FT730V |
| Engine power | | |
| 17.90 kW | 14.90 kW | 17.90 kW |
| Displacement | | |
| 726.00 cm ³ | 726.00 cm ³ | 726.00 cm ³ |
| Fuel Capacity | | |
| 24.60 L | 24.60 L | 24.60 L |
| Air Filter | | |
| Dual Element | Dual Element | Dual Element |
| Electrical | | |
| ZS4000 - 61" | ZS4000 - 48" | ZS4000 - 52" |
| Charging System | | |
| 15.00 A | 15.00 A | 15.00 A |
| Clutch | | |

| | | |
|----------|----------|----------|
| 889.00 N | 889.00 N | 889.00 N |
|----------|----------|----------|

Deck

| ZS4000 - 61" | ZS4000 - 48" | ZS4000 - 52" |
|--------------|--------------|--------------|
|--------------|--------------|--------------|

Mower Deck

| | | |
|----------------------|----------------------|----------------------|
| AirFX Cutting System | AirFX Cutting System | AirFX Cutting System |
|----------------------|----------------------|----------------------|

Leading Edge

| | | |
|--------------------------------|--------------------------------|--------------------------------|
| Adjustable, Front Lip Standard | Adjustable, Front Lip Standard | Adjustable, Front Lip Standard |
|--------------------------------|--------------------------------|--------------------------------|

Width

| | | |
|------------|------------|------------|
| 1549.00 mm | 1219.00 mm | 1320.00 mm |
|------------|------------|------------|

Adjustable Anti-Scalp Rollers

| | | |
|-----|-----|-----|
| 6.0 | 4.0 | 4.0 |
|-----|-----|-----|

Cutting Height

| | | |
|---------------|---------------|---------------|
| 38.0-114.0 mm | 38.0-114.0 mm | 38.0-114.0 mm |
|---------------|---------------|---------------|

Blade Tip Speed

| | | |
|----------------------------|----------------------------|----------------------------|
| 85.4 mps @ 3500 Engine rpm | 84.3 mps @ 3500 Engine rpm | 81.5 mps @ 3500 Engine rpm |
|----------------------------|----------------------------|----------------------------|

Discharge Chute

| | | |
|-------------------------|-------------------------|-------------------------|
| Flexible Molded Polymer | Flexible Molded Polymer | Flexible Molded Polymer |
|-------------------------|-------------------------|-------------------------|

Frame

| ZS4000 - 61" | ZS4000 - 48" | ZS4000 - 52" |
|--------------|--------------|--------------|
|--------------|--------------|--------------|

Front and Rear

| | | |
|---|---|---|
| 1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame | 1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame | 1.5- x 2.5-inch Steel Tubing; Welded Steel Reinforced Frame |
|---|---|---|

Machine Length

| | | |
|------------|------------|------------|
| 1625.00 mm | 1625.00 mm | 1625.00 mm |
|------------|------------|------------|

Machine Weight

| | | |
|-----------|-----------|-----------|
| 470.00 kg | 446.00 kg | 454.00 kg |
|-----------|-----------|-----------|

Transmission

| ZS4000 - 61" | ZS4000 - 48" | ZS4000 - 52" |
|--------------|--------------|--------------|
|--------------|--------------|--------------|

Type

| | | |
|-----------------------------------|-----------------------------------|-----------------------------------|
| HG ZT-3400 Hydrostatic Transaxles | HG ZT-3400 Hydrostatic Transaxles | HG ZT-3400 Hydrostatic Transaxles |
|-----------------------------------|-----------------------------------|-----------------------------------|

Pump Displacement

| | | |
|-----------------------|-----------------------|-----------------------|
| 12.00 cm ³ | 12.00 cm ³ | 12.00 cm ³ |
|-----------------------|-----------------------|-----------------------|

Oil Capacity

| | | |
|--------|--------|--------|
| 7.60 L | 7.60 L | 7.60 L |
|--------|--------|--------|

Forward Speed

| | | |
|------------|------------|------------|
| 16.80 km/h | 16.80 km/h | 16.80 km/h |
|------------|------------|------------|

Reverse Speed

| | | |
|-----------|-----------|-----------|
| 5.60 km/h | 5.60 km/h | 5.60 km/h |
|-----------|-----------|-----------|

Wheels

| ZS4000 - 61" | ZS4000 - 48" | ZS4000 - 52" |
|--------------|--------------|--------------|
|--------------|--------------|--------------|

Drive Wheel Size

| | | |
|--------------|-------------|--------------|
| 23 x 10.5-12 | 23 x 8.5-12 | 23 x 10.5-12 |
|--------------|-------------|--------------|

Front Caster Wheel Size

| | | |
|------------|------------|------------|
| 13 x 6.5-6 | 13 x 6.5-6 | 13 x 6.5-6 |
|------------|------------|------------|

Caster Arm Attachment

| | | |
|---------|---------|---------|
| Bolt-On | Bolt-On | Bolt-On |
|---------|---------|---------|

Operator Platform

| ZS4000 - 61" | ZS4000 - 48" | ZS4000 - 52" |
|--------------|--------------|--------------|
|--------------|--------------|--------------|

Adjustment

| | | |
|-------------------|-------------------|-------------------|
| Flip Up and Latch | Flip Up and Latch | Flip Up and Latch |
|-------------------|-------------------|-------------------|

Rider Pad

| | | |
|-----------------------|-----------------------|-----------------------|
| Removable for Service | Removable for Service | Removable for Service |
|-----------------------|-----------------------|-----------------------|

Vibration Isolation

| | | |
|----------|----------|----------|
| Dampened | Dampened | Dampened |
|----------|----------|----------|

Dimensions

| ZS4000 - 61" | ZS4000 - 48" | ZS4000 - 52" |
|--------------|--------------|--------------|
|--------------|--------------|--------------|

| | | |
|-----------------------------------|-------------|-------------|
| Height (ROP's Up) | | |
| 1062.00 mm | 1062.00 mm | 1062.00 mm |
| Overall Length | | |
| 1625.00 mm | 1625.00 mm | 1625.00 mm |
| Overall Width (Chute Up) | | |
| 1610.00 mm | 1252.00 mm | 1383.00 mm |
| Overall Width (Chute Down) | | |
| 1960.00 mm | 1602.00 mm | 1733.00 mm |
| Cutting Height | | |
| 38 - 114 mm | 38 - 114 mm | 38 - 114 mm |
| Wheelbase | | |
| 1265.00 mm | 1135.00 mm | 1265.00 mm |
| Cutting Width | | |
| 1550.00 mm | 1220.00 mm | 1330.00 mm |
| Blade Length | | |
| 533.00 mm | 415.00 mm | 457.00 mm |

ZS4000 Features

[Expand all](#)

Performance ⁴

Comfort ²

Versatility ²

Serviceability ¹

Durability ¹

Similar Machines



WB700 Zero-Turn Walk-Behind Mower

Walk-behind, mower with high stability in uneven terrain, powerful hydraulic drive, and a proven engine.

[Learn More >](#)



ZT2000 Zero-Turn Mower

The Bobcat ZT2000 is an efficient zero-turn mower that offers unmatched durability and delivers a professional-quality cut.

[Learn More >](#)



ZT3000 Zero-Turn Mower

Ride-on, zero-turn mower with a robust steel-tubed frame.

[Learn More >](#)

